
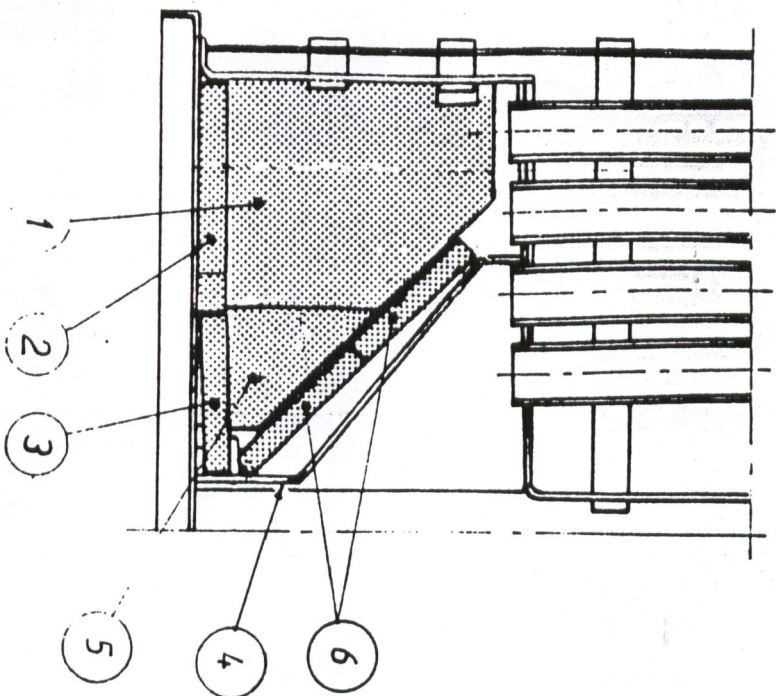


Section



Replacement of "separation baffles" and "protection bricks" in oil-firebox

- I Remove shaker grates and the two old separation baffles (4) through the solid-fuel firebox.
- II Remove the bricks from the oil-firebox in sequence: (2) - (3) - (1)
- III Put in the new separation baffles (4) from the solid-fuel side (be careful, the plates shall fit tightly together). Assemble the shaker grates.
- IV Assemble the bricks in the oil-firebox in sequence: (6) (2 pcs. inclined, added) (5) (front - and rear firebricks, added) (3) - (1) - (2).

Stk	Gegenstand		mrk. nr.	Tegn. nr.	materialie
	 MOOD TARM - DEVI MAHK			skala	tegn. / 1976
	<b>TARM 504</b> Replacement of "separation baffles" and "protection bricks"			(erstattung for)	122813, (ersatztel af)